



Product special

Skips, scoops & crane jibs



TVH PARTS NV • PARTS & ACCESSORIES DIVISION

Brabantstraat 15 • BE-8790 Waregem

T +32 56 43 42 11 • F +32 56 43 44 88 • parts@tvh.com • www.tvh.com

INDEX

CATALOGUES	3
SKIPS	4
ROLL-FORWARD SKIP	4
ROLL-FORWARD SKIP: STAINLESS STEEL	5
BOTTOM EMPTYING SKIP	5
SCOOPS	6
MECHANICAL SCOOP	6
HYDRAULIC SCOOP	6
MECHANICAL SCOOP FOR MANITOU	7
ATTACK BLADES FOR SCOOPS	7
CARRIER-MOUNTED SCOOPS AND CRANE JIBS	8
SCOOP (CARRIER-MOUNTED)	8
CRANE JIB (CARRIER-MOUNTED)	8
FORK-MOUNTED CRANE JIBS	9
PRODUCT SPECIALS	12



CAM price list available in 10 languages!

- English → TVH 20572940
- Dutch → TVH 20673054
- French → TVH 20673043
- German → TVH 20673025
- Italian → TVH 20673046
- Spanish → TVH 20673027
- Portuguese → TVH 20673058
- Russian → TVH 20673059
- Polish → TVH 20673055
- Swedish → TVH 20808384



Accessories and handling equipment catalogue

REF 16865558

This catalogue shows you what TVH can offer in the following ranges:

- In-plant transport systems
- Hand pallet trucks
- Weighing material and scales
- Stackers
- Drum handling
- Jacks
- ...

ROLL-FORWARD SKIPS



VOLUME 300 I

[REF 141TA7294](#)

Width: 800 mm
 Height: 764 mm
 Length: 1400 mm
 Weight: 75 kg
 Max fork section: 230 x 95 mm
 Min distance between forks: 160 mm
 Capacity: 1500 kg
 Without castors

[REF 141TA7295](#)

With nylon castors

[REF 141TA7296](#)

With rubber castors

VOLUME 600 I

[REF 139TA4853](#)

Width: 855 mm
 Height: 870 mm
 Length: 1525 mm
 Weight: 111 kg
 Max fork section: 230 x 95 mm
 Min distance between forks: 160 mm
 Capacity: 1500 kg
 Without castors

[REF 140TA2204](#)

With nylon castors

[REF 140TA2209](#)

With rubber castors

VOLUME 900 I

[REF 139TA4854](#)

Width: 1215 mm
 Height: 870 mm
 Length: 1525 mm
 Weight: 128 kg
 Max fork section: 230 x 95 mm
 Min distance between forks: 160 mm
 Capacity: 1500 kg
 Without castors

[REF 140TA2205](#)

With nylon castors

[REF 140TA2210](#)

With rubber castors

VOLUME 1100 I

[REF 139TA4855](#)

Width: 1620 mm
 Height: 870 mm
 Length: 1490 mm
 Weight: 154 kg
 Max fork section: 230 x 95 mm
 Min distance between forks: 160 mm
 Capacity: 1500 kg
 Without castors

[REF 140TA2206](#)

With nylon castors

[REF 140TA2211](#)

With rubber castors

VOLUME 1600 I

[REF 139TA4856](#)

Width: 1190 mm
 Height: 1248 mm
 Length: 2110 mm
 Weight: 269 kg
 Max fork section: 230 x 95 mm
 Min distance between forks: 510 mm
 Capacity: 1500 kg
 Without castors

[REF 140TA2207](#)

With nylon castors

[REF 140TA2212](#)

With rubber castors

VOLUME 2000 I

[REF 139TA4857](#)

Width: 1410 mm
 Height: 1270 mm
 Length: 2150 mm
 Weight: 296 kg
 Max fork section: 230 x 95 mm
 Min distance between forks: 510 mm
 Capacity: 1500 kg
 Without castors

[REF 140TA2208](#)

With nylon castors

[REF 140TA2213](#)

With rubber castors



Watch the
 Roll-forward
 skip movie

SKIPS

ROLL-FORWARD SKIPS: STAINLESS STEEL

VOLUME 600 I

REF 141TA5263

Width: 855 mm

Height: 870 mm

Length: 1525 mm

Weight: 111 kg

Max fork section: 230 x 95 mm

Min distance between forks: 160 mm

Capacity: 1500 kg

Without castors

REF 141TA5264

With nylon castors

REF 141TA5265

With rubber castors

VOLUME 900 I

REF 141TA5266

Width: 1215 mm

Height: 870 mm

Length: 1525 mm

Weight: 128 kg

Max fork section: 230 x 95 mm

Min distance between forks: 160 mm

Capacity: 1500 kg

Without castors

REF 141TA5267

With nylon castors

REF 141TA5268

With rubber castors



BOTTOM EMPTYING SKIPS



VOLUME 750 I

REF 107TA6341

Width: 1500 mm

Height: 600 mm

Length: 875 mm

Weight: 230 kg

Max fork section: 160 x 70 mm

Min distance between forks: 630 mm

Capacity: 1730 kg

VOLUME 1000 I

REF 107TA6342

Width: 1500 mm

Height: 750 mm

Length: 875 mm

Weight: 250 kg

Max fork section: 160 x 70 mm

Min distance between forks: 630 mm

Capacity: 1750 kg

VOLUME 1300 I

REF 124TA1938

Width: 1500 mm

Height: 1000 mm

Length: 875 mm

Weight: 280 kg

Max fork section: 160 x 70 mm

Min distance between forks: 630 mm

Capacity: 1780 kg

SCOOPS

Fits on forks - Secured with a chain

MECHANICAL SCOOP



Suitable for loose materials such as sand, coal, grain, scrap metal ...

REF 141TA1166

Volume: 600 l
Length: 1873 mm
Width: 965 mm
Height: 606 mm
Depth: 1293 mm
Weight: 250 kg
Max fork section: 170 x 60 mm
Min distance between forks: 466 mm

REF 141TA1304

Volume: 800 l
Length: 1873 mm
Width: 1400 mm
Height: 606 mm
Depth: 1293 mm
Weight: 280 kg
Max fork section: 170 x 60 mm
Min distance between forks: 466 mm

REF 141TA1167

Volume: 1000 l
Length: 1873 mm
Width: 1710 mm
Height: 605 mm
Depth: 1293 mm
Weight: 310 kg
Max fork section: 170 x 60 mm
Min distance between forks: 466 mm

REF 141TA1168

Volume: 1200 l
Length: 1873 mm
Width: 1910 mm
Height: 606 mm
Depth: 1293 mm
Weight: 331 kg
Max fork section: 170 x 60 mm
Min distance between forks: 466 mm

HYDRAULIC SCOOP



Suitable for products sensitive to damage

REF 141TA2233

Volume: 950 l
Width: 1460 mm
Height: 772 mm
Depth: 1394 mm
Weight: 250 kg
Max fork section: 185 x 70 mm
Min distance between forks: 660 mm

REF 141TA2234

Volume: 1100 l
Width: 1840 mm
Height: 772 mm
Depth: 1394 mm
Weight: 360 kg
Max fork section: 185 x 70 mm
Min distance between forks: 660 mm

HYDRAULIC SCOOP



Suitable for grain, fertilizer, compost ...

REF 135TA5691

Volume: 750 l
Width: 1200 mm
Height: 750 mm
Depth: 1400 mm
Weight: 350 kg
Max fork section: 150 x 70 mm
Min distance between forks: 650 mm

REF 135TA5692

Volume: 1000 l
Width: 1600 mm
Height: 750 mm
Depth: 1400 mm
Weight: 385 kg
Max fork section: 150 x 70 mm
Min distance between forks: 650 mm

REF 135TA5693

Volume: 1300 l
Width: 2000 mm
Height: 750 mm
Depth: 1400 mm
Weight: 430 kg
Max fork section: 150 x 70 mm
Min distance between forks: 650 mm

SCOOPS

MECHANICAL SCOOP FOR MANITOU

REF 141TA6685

Width: 2200 mm
 Height: 800 mm
 Depth: 1100 mm
 Volume: 900 l


We can also offer this for other brands. Ask your sales advisor for more info.



ATTACK BLADES FOR SCOOPS

Single bevelled edge

REF	A	H	B	D	C	Weight [kg/m]	Hardness
135TA9652	110 mm	12 mm	3 mm	2 mm	24°	9,6	HB 500
135TA9653	110 mm	16 mm	7 mm	2 mm	24°	13,1	
135TA9654	150 mm	16 mm	6 mm	5 mm	24°	17,8	
135TA9655	150 mm	20 mm	5 mm	5 mm	23°	21,7	
135TA9656	200 mm	20 mm	6 mm	8 mm	23°	29,6	
135TA9657	200 mm	25 mm	11 mm	8 mm	23°	36,7	
135TA9658	250 mm	25 mm	6 mm	10 mm	23°	44,8	
135TA9659	250 mm	30 mm	11 mm	10 mm	23°	55,8	
135TA9660	300 mm	30 mm	8 mm	8 mm	23°	66,2	

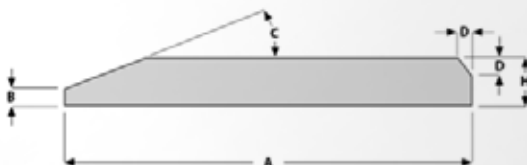



Double bevelled edge

REF	A	H	B	C	Weight [kg/m]	Hardness
141TA6693	152 mm	16 mm	5 mm	25°	17,3	HB 500
141TA6694	203 mm	16 mm	9 mm	25°	23,6	



CARRIER-MOUNTED SCOOPS AND CRANE JIBS

SCOOP (CARRIER-MOUNTED)





1 hydraulic function
Maximum pressure: 160 bar

Recommended oil flow: 20 l/min
Double ram operated

REF	Volume	Capacity	Tilt	A	B	C	L	LC	LO	LV	CGO	Weight	ISO 2328
	l	kg/mm	degrees +/-	mm	mm	mm	mm	mm	mm	mm	mm	kg	
141TA7896	310	800/500	40/40	900	560	735	900	410	1200	1030	480	380	2
141TA7897	490	1200/500	40/40	1400	560	735	900	390	1200	1030	480	410	2/3
141TA7898	560	1400/500	40/40	1600	560	735	900	430	1200	1030	480	455	2/3
141TA7899	810	2000/500	40/40	1800	650	735	985	390	1345	1180	580	545	2/3
141TA7900	1000	2500/500	40/40	2350	660	735	985	405	1345	1180	580	580	2/3


CRANE JIB (CARRIER-MOUNTED)



REF	Capacity	A	B	C	D	E	F	G	H x I	LL	CG	Weight	ISO 2328
	kg/mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	
141TA7901	1000/500	1000	1000	100	100	60	130	245	600x500	115	190	95	2
141TA7902	2000/500	1000	1000	140	120	60	150	490	600x500	160	220	135	2
141TA7903	3000/500	1000	1500	160	130	70	250	350	800x600	190	290	212	3
141TA7904	4000/500	1000	2000	180	140	70	250	410	800x600	210	470	273	3/4
141TA7905	6000/500	1200	2000	240	170	100	250	470	800x735	270	550	500	4
141TA7906	7000/600	1900	2900	240	160	100	250	590	800x735	280	735	600	4

FORK-MOUNTED CRANE JIBS

Adjustable in length

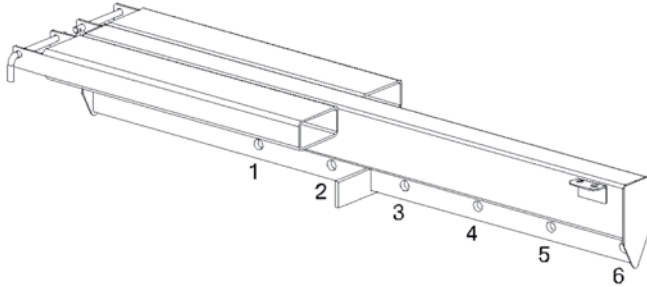

Position of the safety lifting hook

REF	Load centre 500 mm 1	Load centre 750 mm 2	Load centre 1000 mm 3	Load centre 1250 mm 4	Load centre 1500 mm 5	Load centre 1750 mm 6	Max arm length	Max fork spread measured over forks	Fits on max fork section	Centre of gravity	Weight
	kg	Kg	kg	kg	kg	kg	mm	mm	mm	mm	kg
107TA6407	2000	1800	1600	1200	900	600	1750	450	135 x 60	675	151
107TA6409	4000	3800	3200	2500	1900	1100	1750	450	155 x 60	757	156




- The fork-mounted crane jib has 1 adjustable swivelling safety lifting hook.
- The hook can be adjusted every 250 mm (6 different positions).
- The crane jib is safely secured behind the fork heels with locking pins.
- Please keep the capacity of the lift truck in mind.
- Fully tested and CE-certified.
- Painted orange.

Option: longer arms.

Warning: minimum fork length required to maintain capacities listed above is 1200 mm!

CRANE JIBS – FORK-MOUNTED

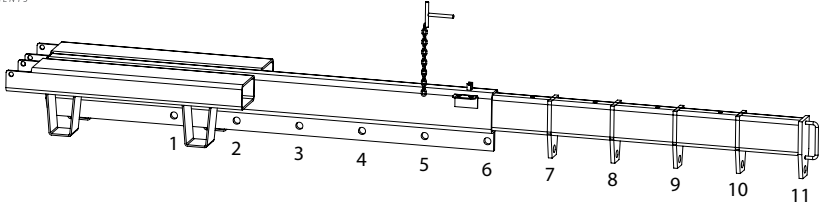

Position of the safety lifting hook

REF	Load centre	Load centre	Load centre	Load centre	Load centre	Load centre	Load centre	Load centre	Load centre	Load centre	Load centre	Max arm length	Max fork spread measured over forks	Fits on max fork section	Weight
	500 mm	750 mm	1000 mm	1250 mm	1500 mm	1750 mm	2000 mm	2250 mm	2500 mm	2750 mm	3000 mm				
	1	2	3	4	5	6	7	8	9	10	11	mm	mm	mm	kg
107TA6410	2000	1800	1600	1200	900	600	500	400	350	280	200	3000	450	150 x 65	151
107TA6412	4000	3800	3200	2500	1900	1100	975	850	650	500	400	3000	450	150 x 65	156




- The fork-mounted crane jib has 2 adjustable swivelling lifting safety hooks.
- The lifting hooks can be adjusted every 250 mm (11 different positions).
- The crane jib is safely secured behind the fork heels with locking pins.
- The fixed crane arm has a length of 2000 mm with a total telescopic length of 3000 mm.
- Please keep the capacity of the lift truck in mind.
- Fully tested and CE-certified.
- Painted orange.

Option: longer arms.

Warning: minimum fork length required to maintain capacities listed above is 1200 mm!

CRANE JIBS – FORK-MOUNTED

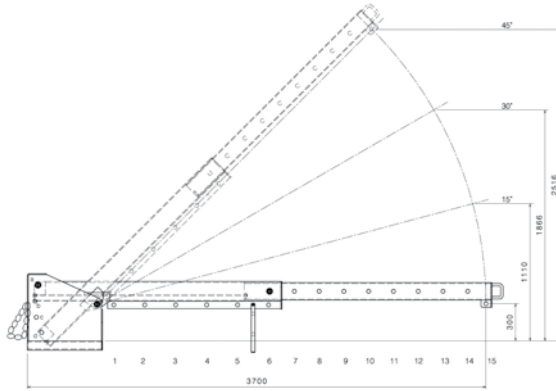


Position of the safety lifting hook

Position	Fixed arm					Extendible arm									
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
REF 107TA6423 – capacity: 2500 kg															
Capacity (kg)	2500	2500	2500	1800	1400	1200	1050	950	850	770	700	650	600	560	500
Load centre (mm)	700	950	1200	1450	1700	1950	2100	2300	2500	2700	2900	3100	3300	3500	3700
REF 107TA6424 – capacity: 5000 kg															
Capacity (kg)	5000	3550	2750	2250	1950	1700	1550	1400	1300	1200	1150	1050	1000	950	900
Load centre (mm)	700	950	1200	1450	1700	1950	2100	2300	2500	2700	2900	3100	3300	3500	3700

REF	Capacity at 700 mm load centre	Minimum fork length	Max fork spread measured over forks	Fits on max fork section	Weight
	kg	mm	mm	mm	kg
107TA6423	2500	800	549	160 x 55	218
107TA6424	5000	800	574	160 x 70	250

- The carriage-mounted crane jib has two adjustable swivelling safety lifting hooks.
- The hook can be manually adjusted in 15 positions in length and in height.
- The crane jib is safely secured with a chain to the fork carriage.
- Standard length of the arm is 2100 mm, maximum length of the arm is 3700 mm.
- The crane jib has to be mounted on to the forks and with the back of the jib against the back of the forks.
- Please keep the capacity of the lift truck in mind.
- Fully tested and CE-certified.
- Painted orange.

Option: longer arms.

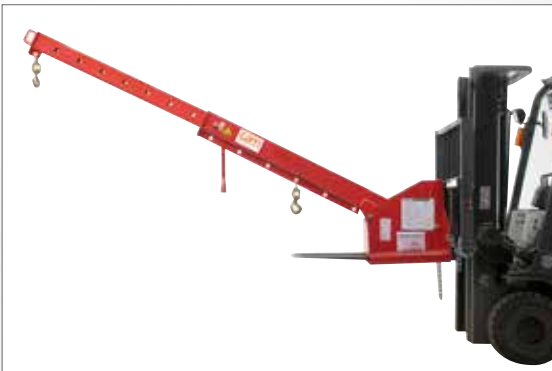

PRODUCT SPECIALS



- Beta quality tools & workwear REF 17857457
- Brake fluids, mineral & transmission oils REF 14286693
- Document & accessories holders REF 14372877
- Drum handling special REF 18253535
- Forks & accessories REF 14616237
- Hardware special REF 18805081
- In the spotlight REF 20382688
- Jacks & supports REF 18178749
- Light special REF 20843889
- Maintenance special REF 20382686
- Mirror special REF 20778928
- Press special REF 17868205
- Pressol, lubrication & garage equipment REF 17783573
- Safety & ergonomics REF 18666614
- Seats & accessories REF 14836726
- Skips, scoops & crane jibs REF 20963014
- Summer special REF 20143873
- Twistlocks REF 19550195
- Tyres & accessories REF 15372984
- Weighing special REF 18329658
- Windows special REF 18545076
- Winter products REF 18663385

We gladly keep you informed of our extensive product range. In addition to our catalogues we therefore also present you with our 'product specials': useful digital brochures that will guide you within specific product categories. Save the link in your favourites. You will regularly discover new e-folders with numerous innovations.

More safety products & accessories in our 'Consumables & accessories catalogue':
REF 20560977



For all catalogues, go to
www.tvh.com/catalogue

www.tvh.com/productspecials



FOLLOW US



PARTS & ACCESSORIES



COMPANY MOVIE